



11

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B</b>	<b>A2</b>	(11) International Publication Number: <b>WO 99/66643</b> (43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: PCT/KR99/00293 (22) International Filing Date: 14 June 1999 (14.06.99) (30) Priority Data: 1998/22215 13 June 1998 (13.06.98) KR (71) Applicant: SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR). (72) Inventors: MOON, Hi, Chan; 391, Pungnap-dong, Songpa-gu, Seoul 138-040 (KR). KIM, Jong, Han; Byeoksan Apt., #202-1103, Jukjeon-ri, Suji-up, Yongin-shi, Kyonggi-do 449-840 (KR). (74) Agent: LEE, Keon, Joo; Mihwa Building, 110-2, Myon- gryun-dong 4-Ga, Chongro-gu, Seoul 110-524 (KR).		(81) Designated States: AU, BR, CA, CN, ID, IL, JP, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished          upon receipt of that report.</i>
(54) Title: DEVICE AND METHOD FOR MEASURING NON-ORTHOGONAL NOISE POWER FOR CDMA COMMUNICATION SYSTEM <div data-bbox="375 1176 1252 1478" data-label="Diagram"> </div>		
(57) Abstract <p>A non-orthogonal noise detecting device for a CDMA communication system. In the device, a despreader despreads multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate despread repeated symbols. A difference signal generator receives the despread second symbols, and generates a difference signal between a presently received second symbol and a previously received second symbol. A noise detector converts the difference signal to an energy value to generate a non-orthogonal noise signal.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**DEVICE AND METHOD FOR MEASURING NON-ORTHOGONAL  
NOISE POWER FOR CDMA COMMUNICATION SYSTEM**

5

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates generally to a receiving device and method  
10 for CDMA communication systems, and in particular, to a device and method for  
measuring non-orthogonal noise power of a received channel signal.

**2. Description of the Related Art**

Code division multiple access (CDMA) communication systems use  
orthogonal codes for channel separation. In particular, a forward link typically  
15 employs a synchronous CDMA technique which separates users with the  
orthogonal codes. In a non-multi-path environment, there is no interference  
among the channels using different orthogonal codes. Even in the multi-path  
environment, an orthogonality among the respective channels is maintained with  
respect to the multi-path signal components. Therefore, although some of the  
20 signals input to the respective fingers act as interference, most of the signals do  
not act as interference.

Accordingly, to implement an effective CDMA communication system, it

is necessary to accurately measure the signal components acting as interference, i.e., non-orthogonal noise power. The measured non-orthogonal noise power can be used to determine a signal-to-interference ratio (SIR) for controlling gains of the fingers in a receiving device.

5           A method for measuring the non-orthogonal noise power is disclosed in U.S. Patent No. 5,559,790 (hereinafter "the '790 patent") issued to Yano et al. In the disclosed non-orthogonal noise measuring method, a specified orthogonal code from the available orthogonal codes for the forward link is not assigned to the forward link. A base station sends information about the non-assigned  
10 orthogonal code to the mobile stations. The mobile stations then despread the received channel signal on the forward link with the assigned orthogonal codes, and calculate the energy component of the despread channel signal to detect a non-orthogonal noise component.

          In the configuration described in the '790 patent, since a specific  
15 orthogonal code is assigned to the forward link for measurement of the non-orthogonal noise power, the specific orthogonal code cannot be used for the other channels. That is, even when additional orthogonal codes may be required to increase the efficiency of the forward link, the specified orthogonal code cannot be used. Furthermore, in the IS-95 standard, it is impossible to use the  
20 specific code in measuring the non-orthogonal noise power.

          In addition, U.S. Patent No. 5,754,533 issued to Bender et al. discloses another non-orthogonal noise measuring method wherein a receiving device estimates the energy detected by despreading a received signal on a channel having a low signal power as a non-orthogonal noise component (or power).  
25 Here, the channel having the low signal power is an IS-95 sync channel.

However, this non-orthogonal noise measuring method estimates a value obtained by adding a sync channel data signal component, no matter how low it is, to the non-orthogonal noise power. So, it is impossible to accurately measure the non-orthogonal noise power.

5

### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a device and method for measuring, at a receiving device, a non-orthogonal noise component included in a signal transmitted from a transmitting device in a CDMA communication system.

10 It is another object of the present invention to provide a device and method for measuring a non-orthogonal noise component from a repetition pattern for a channel where the same data is repeated, in a CDMA communication system.

It is a further object of the present invention to provide a device and  
15 method for measuring a non-orthogonal noise component from a repetition pattern for a traffic channel of low rate, in a CDMA communication system.

To achieve the above objects, there is provided a non-orthogonal noise detecting device for a CDMA communication system. The device comprises a despreader for despread multiple channel signals including a specific  
20 channel with an orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate despread repeated symbols; a difference signal generator for receiving the despread second symbols, and generating a difference signal between a presently

received second symbol and a previously received signal second symbol; and a noise detector for converting the difference signal to an energy value to generate a non-orthogonal noise signal.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

5           The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a diagram illustrating a channel transmission device for transmitting a non-orthogonal noise component in a CDMA communication  
10 system according to an embodiment of the present invention;

FIG. 2 is a diagram illustrating a symbol structure for a channel used in measuring non-orthogonal noise power in a channel transmission device of FIG. 1;

FIG. 3 is a diagram illustrating a channel reception device for measuring  
15 non-orthogonal noise power in a CDMA communication system according to an embodiment of the present invention;

FIGs. 4A and 4B are diagrams illustrating channel transmission and reception devices for measuring non-orthogonal noise power in a CDMA communication system according to another embodiment of the present  
20 invention;

FIG. 5 is a diagram illustrating a mobile station reception device for determining a power control command depending on the non-orthogonal noise power according to an embodiment of the present invention;

FIG. 6 is a diagram illustrating a finger of FIG. 5 according to a first  
25 embodiment of the present invention;

FIG. 7 is a diagram illustrating a symbol combiner and SIR measurer of

FIG. 5 when the fingers have the structure of FIG. 6;

FIG. 8 is a diagram illustrating a finger of FIG. 5 according to a second embodiment of the present invention; and

FIG. 9 is a diagram illustrating a symbol combiner and SIR measurer of  
5 FIG. 5 when the fingers have the structure of FIG. 8.

FIG. 10 shows a receiver for measuring non-orthogonal noise power according to another embodiment of the present invention.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

The present invention is directed to measuring non-orthogonal noise  
10 power acting as interference noise to respective fingers in a CDMA communication system. It is assumed for each of the described embodiments that a forward link channel reception device, for receiving a signal output from a forward link channel transmission device, measures the non-orthogonal noise included in the received signal.

15 In the forward link, even though the respective channels are spread with orthogonal codes to prevent interference, some of the signals may function as interference due to multi-path. Here, the interference signal is representative of a non-orthogonal component, and an accurate measurement of the non-orthogonal noise component is very important in designing a receiver. Accordingly, to  
20 measure a non-orthogonal noise component, the embodiment uses a forward link channel where the same data (i.e., all zeros or all ones) not including specific information (i.e., exclusive of data and voice) is transmitted. A low rate traffic channel may also be used where the same data symbol is repeated. For example, the forward link channel repeating the same data with no specific information  
25 may be a pilot channel, and the low rate channel repeating the same data symbol

may be a sync channel. Accordingly, a non-orthogonal noise measuring method according to the present invention can assign all the available orthogonal codes for the system as orthogonal codes to separate the channels. That is, in accordance with the present method, there is no need to dedicate one or more  
5 orthogonal codes for the purpose of measuring a non-orthogonal noise component as is performed in the prior art.

With reference to FIG. 1, there is illustrated a channel transmission device for a forward link and three channels including a pilot channel not including specific information in an IS-95 system, a low rate sync channel repeating the  
10 same symbols, and a traffic channel.

In FIG. 1, the pilot channel comprises all "0"s (i.e., not including specific information). A spreader 102 multiplies the pilot signal by an orthogonal code for the pilot channel to generate an orthogonally spread pilot signal. The sync channel includes sync channel information, but outputs data at a low rate of  
15 1.2Kbps. The 1.2Kbps signal on the sync channel is encoded by an encoder 104. A convolutional encoder having a coding rate  $R=1/2$  can be used for the encoder 104. In this case, the 1.2Kbps sync channel signal is encoded into 2.4Ksps (symbols per second). A symbol repeater 106 repeats the symbols twice on the sync channel output from the encoder 104. An interleaver 108 interleaves the  
20 symbols on the sync channel outputted from the symbol repeater 106 to prevent a burst error. A block interleaver can be used for the interleaver 108. A spreader 110 multiplies the sync channel signal output from the interleaver 108 by an orthogonal code assigned for the sync channel to generate an orthogonally spread sync channel signal.

25 The forward link also includes traffic channels which establish an



exclusive link between a base station and a specific mobile station for transmission of data and voice, and a paging channel which is a common channel used when a base station pages a specific mobile station prior to a call setup. Here, the channel for actually transmitting data is called a traffic channel. There  
5 is various traffic channel in a CDMA system for transport voice, text, image, facsimile and moving picture data. In the embodiment, it is assumed that the traffic channel is a paging channel. The traffic channel has a data rate of 19.2Ksps or 9.6Ksps.

The paging channel is a channel for actually transmitting data to a mobile  
10 station, and outputs data at a higher rate than the sync channel. The 9.6Kbps (or 4.8Kbps) signal on the paging channel is encoded by an encoder 114, for which an  $R=1/2$  convolutional code can be used. In this case, the 9.6Kbps (or 4.8Kbps) paging channel signal is encoded into 19.2Ksps (or 9.6Ksps) symbols. A symbol repeater 116 repeats one time (or two times) the symbols on the paging channel  
15 output from the encoder 114. An interleaver 118 interleaves the symbols on the paging channel outputted from the symbol repeater 116 to prevent a burst error. A block interleaver can be used for the interleaver 118. A spreader 120 multiplies the paging channel signal output from the interleaver 118 by an orthogonal code assigned for the paging channel to generate an orthogonally  
20 spread paging channel signal.

It is noted from the foregoing that a final symbol rate of the sync channel is 4.8Ksps, which is  $1/4$  times a symbol rate (19.2Ksps) of the traffic channel. Accordingly, to match the data rate, 4 symbols of a short period are repeated. Herein, a method for effectively measuring the non-orthogonal noise component  
25 will be described with reference to the sync channel, which repeats the same symbols. In accordance with the method of the present invention, a forward link

reception device then measures the non-orthogonal noise component using the sync channel which repeat the same symbols.

With reference to FIG. 2, there is shown a sync channel for the IS-95 forward link, which is despread with an orthogonal code. In FIG. 2, despread  
 5 symbols  $S_{(n,1)}, \dots, S_{(n,4)}$  constitute one sync channel symbol unit, which corresponds to 4 short-period symbols. That is, when one sync channel symbol is transmitted at 4.8Ksps and one traffic channel symbol is transmitted at 19.2Ksps, four traffic channel symbols can be transmitted for one-sync channel symbol duration. Herein, the synch channel symbol is referred to as a first symbol and  
 10 the traffic channel symbol is referred to as a second symbol. All of the 4 second symbols divided at a first symbol duration of the sync channel maintain the same value. As such, the first two second symbol values subtracted from the next two short-period symbol values will always become zero. However, in the case where the symbols on the sync channel are corrupted from interference signals,  
 15 the non-orthogonal noise component can be detected by performing the same difference calculation, namely, a difference between the first two second symbols and the following two symbols.

The calculation is described by Equation 1 below. From the received signal on the sync channel, a non-orthogonal noise component can be calculated  
 20 by

$$\text{Non-orthogonal noise power} = (I_{2n} - I_{2n-1})^2 + (Q_{2n} - Q_{2n-1})^2 \quad [\text{Equation 1}]$$

where  $I_n$  and  $Q_n$  represent symbol values for I-channel and Q-channel of the received complex signal, respectively.

With reference to FIG. 3, there is illustrated a receiver for measuring a non-orthogonal noise component using Equation 1. Referring to FIG. 3, a despreader 311 multiplies a received signal by an orthogonal code assigned to a specific channel, to despread an orthogonally spread signal. The specific channel  
 5 can be a channel not carrying specific information or a low rate channel repeating the same data. In the embodiment, the specific channel is assumed to be a sync channel (i.e., low data rate channel).

In this case, the despreader 311 despreads a received spread sync channel signal by multiplying the received signal by an orthogonal code assigned to the  
 10 sync channel. An accumulator 313 accumulates the sync channel signals (or first symbol) output from the despreader 311 each traffic channel symbol period. Here, one sync channel symbol duration (or first symbol) can be four traffic channel symbols (or second symbols) duration, which are  $S_{(n,1)}$ ,  $S_{(n,2)}$ ,  $S_{(n,3)}$ , and  $S_{(n,4)}$  as shown in FIG. 2. A delay 315 delays an output signal of the accumulator  
 15 313 by one symbol period. A subtracter 317 subtracts a present sync channel symbol value outputted from the accumulator 313 from a previous sync channel symbol value output from the delay 315, to calculate a difference between the two symbols. A squarer 319 squares the difference value between the two symbols, output from the subtracter 317, to detect power of the noise component.  
 20 A down-sampler 321 down-samples the non-orthogonal noise component between specific symbols, output from the squarer 319. Also, the down-sampler 321 selects non-orthogonal noise power between the specific symbols from the output of the squarer 319. That is, for the case of FIG. 2, a value determined according to a difference between the symbols  $S_{(n,1)}$  and  $S_{(n,2)}$  is not selected as  
 25 non-orthogonal noise power. The squarer 319 selects the non-orthogonal noise power detected at a boundary between the symbol durations (for example,  $S_{(1,4)}$  and  $S_{(2,1)}$ ;  $S_{(2,4)}$  and  $S_{(3,1)}$ ; ...;  $S_{(n,4)}$  and  $S_{(1,1)}$ ). A filter 323 bandpass filters the

non-orthogonal noise power output from the down-sampler 321. The filter 323 can be composed of an IIR (Infinite Impulse Response) or FIR (Finite Impulse Response) filters to attain an appropriate bandwidth.

In operation, the receiver described at FIG. 3 receives a PN (Pseudo-  
5 random Noise) despread baseband signal and multiplies the signal by an  
orthogonal code for the sync channel to be despread and converted to a symbol  
unit signal at the despreader 311 and the accumulator 313. Here, the symbol unit  
becomes the traffic channel symbol, not the sync channel symbol. Therefore, the  
sync channel symbol is divided into four traffic channels and accumulated. The  
10 converted symbol-unit signals are provided to the delay 315 and the subtracter  
317. The subtracter 317 then calculates the difference between the present  
symbol and the previous symbol delayed by the delay 315. The output value of  
the subtracter 317 becomes the non-orthogonal noise component, which is  
provided to the squarer 319 to calculate the non-orthogonal noise power. The  
15 squarer 319 squares the subtracted values for the I- and Q-channels to generate  
the non-orthogonal noise power. The down-sampler 321 selecting an output of  
the squarer 319 in units of two symbols to select a non-orthogonal noise signal.  
Here, the down-sampler 321 should not select the non-orthogonal noise power  
calculated at the symbol boundary of the sync channel. When the sync channel  
20 symbols are changed (e.g.,  $S_{(1,4)}$  and  $S_{(2,1)}$ ), the symbol values are changed.  
Therefore, energy detected at this time is not the pure non-orthogonal noise  
power. Therefore, the down-sampler 321 selects only the non-orthogonal noise  
power detected at the same sync channel symbol duration.. The output of the  
down-sampler 321 is provided to the filter 323, which controls a bandwidth of  
25 the non-orthogonal noise component. The filter 323 bandpass filters the  
non-orthogonal noise component to output the non-orthogonal noise value at  
specified periods.

While a description has been provided for the case where the low rate channel used in measuring the non-orthogonal noise component repeats the same data, the same measuring method can be applied to the case where a transmitter transmits a specific pattern without repeating the same data (e.g., all zeros or all  
5 ones). This is illustrated in FIGs. 4A and 4B.

First, a description will be made regarding an operation of a transmitter with reference to FIG. 4A. A channel 401 to be transmitted is a channel having a low data rate of 1.2Kbps. A 1.2Kbps signal on the low rate channel is encoded by an encoder 402, for which an  $R=1/2$  convolutional encoder can be used. In  
10 this case, the low rate signal of 1.2Kbps is encoded into 2.4Ksps symbols. A symbol repeater 403 repeats two times the low rate channel symbols output from the encoder 402 to output 4.8K symbols per second. An interleaver 404 interleaves the low rate channel symbols outputted from the symbol repeater 403 to prevent a burst error. A block interleaver can be used for the interleaver 404.  
15 A multiplier 406 multiplies an output of the interleaver 404 by an output of a pattern generator 405. Here, the pattern generator 405 and the multiplier 406 constitute an inserter. A despreader 408 multiplies a low rate channel signal outputted from the multiplier 406 by an orthogonal code assigned to the low rate channel to generate an orthogonally spread signal.

20 Next, a description will be provided regarding an operation of a receiver with reference to FIG. 4B. A despreader 411 multiplies a received signal by an orthogonal code assigned to a specific channel to despread the orthogonally spread signal received from the transmitter. An accumulator 412 accumulates the low rate channel signals outputted from the despreader 411 at periods of one  
25 symbol. Here, the accumulator 412 accumulates the low rate channel symbols by accumulating the signal despread at one low rate channel symbol duration in a

unit of a high rate channel symbol duration. A pattern generator 413 generates the same pattern as that of the pattern generator 405 in the transmitter. A multiplier 414 multiplies an output of the accumulator 412 by an output of the pattern generator 413. Here, the multiplier 414 and the pattern generator 413  
5 constitute a pattern detector. A delay 415 delays an output signal of the multiplier 414 by one symbol period. A subtracter 416 subtracts a present low rate channel symbol value output from the multiplier 414 from a previous low rate channel symbol value output from the delay 415, to calculate a difference between the two symbols. A squarer 417 squares the difference value between  
10 the two symbols, output from the subtracter 416, to detect the non-orthogonal noise power. A down-sampler 418 down-samples the noise power, output from the squarer 417. Also, the squarer 418 selects the non-orthogonal noise power between the specific symbols from the output of the squarer 417. In this case, the down-sampler 418 should not select the non-orthogonal noise components  
15 generated at the boundary of the low rate channel symbol. A filter 419 bandpass filters the non-orthogonal noise power output from the down-sampler 418. The filter 419 can be composed of an IIR (Infinite Impulse Response) or FIR (Finite Impulse Response) filters to attain an appropriate bandwidth.

In operation, the received signal being a PN despread baseband signal is  
20 multiplexed by an orthogonal code for the sync channel to be despread at the despreader 411, and the despread low rate channel symbols are converted and accumulated in a unit of high rate channel symbol duration at the accumulator 412. The converted symbol unit signals are multiplied, at the multiplier 414, by the same pattern as that used in the transmitter. An output of the multiplier 414 is  
25 provided in common to the delay 415 and the subtracter 416. The subtracter 416 then subtracts the present symbol from the previous symbol output from the delay 415 to calculate the difference between the two symbols. Here, the

difference value output from the subtracter 416 becomes a non-orthogonal noise component, which is inputted to the squarer 417 to calculate the non-orthogonal noise power. The square 417 squares the difference values for the I and Q-channels to generate the non-orthogonal noise power. The down-sampler 418 has  
5 the function of detecting an output of the squarer 417 in the unit of two symbols. An output of the down-sampler 418 is applied to the filter 419 which controls a bandwidth of the non-orthogonal noise component. The filter 419 bandpass filters the non-orthogonal noise component to output non-orthogonal noise power at periods of a specific duration.

10 FIG. 10 shows a receiver for measuring non-orthogonal noise power according to another embodiment of the present invention. A despreader 1011 despreads an orthogonally spread signal by multiplying a received signal by an orthogonal code assigned to a specific channel. Specifically, the despreader 1011 despreads the received spread low rate channel signal by multiplying the  
15 received signal by an orthogonal code assigned to the specific channel. An accumulator 1012 accumulates the low rate channel signal output from the despreader 1011 in a unit of one symbol. Here, the accumulator 1012 accumulates the despread low rate channel symbols by accumulating the signal despread at one low rate channel symbol duration in a unit of a high rate channel  
20 symbol duration. A specific pattern generator 1013 generates the same pattern as that of the pattern generator 405 in the transmitter. A multiplier 1014 multiplies an output of the accumulator 1012 by an output of the pattern generator 1013. Here, the multiplier 1014 and the pattern generator 1013 constitute a pattern detector. An operation hereto is the same as that of the receiving device of FIG.  
25 4.

The despread symbols are provided to a delay 1015 and a gain controller

1018. The receiver of FIG. 10 includes delays capable of storing several despread symbols to store symbols as many as the last received repeated symbol NUM\_SYM. To receive symbols of the sync channel shown in FIG. 2, the receiver of FIG. 10 may include three delays 1015, 1016 and 1017. In this case,  
 5 the delays 1015, 1016 and 1017 each have three delay elements so that they can store three previous symbols with respect to a present symbol. Here, the number of the delay elements is equal to or lower than a frequency of transmissions.

For convenience, a present despread symbol will be referred to as  $X_n$ , a one-symbol previous symbol  $X_{n-1}$ , a two-symbol previous symbol  $X_{n-2}$  and a  
 10 three-symbol previous symbol  $X_{n-3}$ . In this manner, a  $k$ -symbol previous symbol will be referred to as  $X_{n-k}$ . Then, a present input symbol and symbols stored in the delays 1015-1017 are multiplied at the gain controllers 1018-1022 by corresponding gain control values  $C_0$ - $C_3$ , respectively, and then added at an adder 1023. An output of the adder 1023 can be defined as:

15 [Equation 2]  

$$Y_n = C_0 * X_n + C_1 * X_{n-1} + \dots + C_k * X_{n-k}$$

In Equation 2, gain control values are set to be  $C_0 + C_1 + \dots + C_k = 0$ . Since the transmitter repeats data symbols several times before transmission, the value  $Y_n$  of Equation 2 should be zero in a noise-less environment.

20 In the embodiment of FIG. 10, since  $k=3$ , Equation 2 can be rewritten as:

$$Y_n = C_0 * X_n + C_1 * X_{n-1} + C_3 * X_{n-3}$$

$$C_0 + C_1 + C_3 = 0$$



The  $Y_n$  value calculated at the last symbol of the above repetitive duration should be zero in the noise-less environment. However, when the received symbol includes a non-orthogonal noise component, the value  $Y_n$  may have a non-zero value due to the non-orthogonal noise component. In this case, the non-orthogonal noise power required by the receiver can be calculated by squaring the value  $Y_n$  and averaging the squared value for a predetermined time.

Although a description has been made regarding a case where non-orthogonal noise power is calculated depending on only the  $Y_n$  value in the embodiment of FIG. 10, it is also possible to measure the non-orthogonal noise power by calculating  $Y_n'$  using other coefficients  $C_0', C_1', C_2', C_3'$  ( $C_0' + C_1' + C_2' + C_3' = 0$ ). In this case, although complexity and calculations of the receiver increase, it is possible to measure the non-orthogonal noise power more accurately.

A squarer 1024 squares the value  $Y_n$  output from the adder 1023 to detect energy of the non-orthogonal noise component. A down-sampler 1025 then down-samples noises among specific symbols, output from the squarer 1024. From an output of the squarer 1024, the down-sampler 1025 selects the specific symbols and the non-orthogonal noise power among the symbols. In this case, the down-sampler 1025 should not select the non-orthogonal noise components generated at the boundary of the low rate channel. A filter 1026 bandpass filters an output of the down-sampler 1025 to output the non-orthogonal noise power.

With reference to FIG. 5, there is illustrated a baseband receiver which processes complex signals including I and Q-channel components. For convenience, a detailed description of the baseband receiver will be avoided herein. The baseband receiver includes an automatic gain controller (AGC) 512,

a searcher 514, M fingers 521-52M, a combiner and a signal-to-interference ratio SIR measurer 532.

The AGC controller 512 measures the energy of an input signal to generate a gain control signal for controlling a gain of an AGC amplifier. A  
5 searcher 514 searches for a high-power multi-path component to which a finger is to be assigned after initial acquisition and cell search. The fingers 521-52M demodulate multi-path components assigned by the searcher 514 and measure local SIRs of the demodulated multi-path components. The combiner and SIR  
10 measurer 532 combines the local SIRs calculated by the fingers 521-52M to calculate an effective SIR of the overall receiver, to determine a power control command.

In the SIR measuring and power control method, the respective fingers 521-52M in the receiver, despreads the received signals with the orthogonal codes assigned to the corresponding channels to measure interference  
15 components, and calculate the local SIRs. The combiner and SIR measurer 532 then calculates the effective SIR of the receiver by combining the local SIRs of the respective fingers 521-52M. The effective SIR is then compared with a threshold. Based on the comparison, when the SIR is higher than the threshold, a power-down command for decreasing the forward link is generated; when the  
20 SIR is lower than the threshold, a power-up command is generated for increasing the forward link.

#### A. First Embodiment

With reference to FIG. 6, there is a detailed illustration of a finger for measuring an SIR by measuring the energy of an input component of a received  
25 signal. In FIG. 6, all the signals are complex signals.

Referring to FIG. 6, a multiplier 611 despreads an input signal by mixing the input signal with a PN sequence. A channel estimator 613 estimates the strength and phase of a multi-path channel response from the despread pilot signal. A complex conjugator 615 complex conjugates an output of the channel estimator 613. A multiplier 617 multiplies an output of the multiplier 611 by a Walsh code for the traffic channel, to extract the traffic channel data. An accumulator 619 accumulates the traffic channel signal output from the multiplier 617 in the symbol unit to output an intended data component. A multiplier 621 multiplies an output of the complex conjugator 615 by an output of the accumulator 619 to output data symbols to the symbol combiner 531.

A signal energy detector 623 squares the respective signal components output from the accumulator 619 ( $I^2 + Q^2$ ) to calculate the signal energy. A filter 625 filters the signal energy outputted from the signal energy detector 623 to output a received signal component of the corresponding finger.

Interference power is detected by a non-orthogonal noise measurer 630 having the same structure as illustrated in FIGs. 3 and 4. In FIG. 6, the non-orthogonal noise measurer 630 employs the configuration of FIG. 3. The non-orthogonal noise component measured by the non-orthogonal noise measurer 630 is provided to a demultiplier 627 which demultiplies (or divides) a signal component by the non-orthogonal noise component output from the filter 625 to generate a local SIR signal of the corresponding finger.

As described above, the finger of FIG. 6 calculates the symbol energy of the traffic channel, filters the calculated symbol energy and calculates the signal component. Further, the finger detects the non-orthogonal noise component according to the present invention and then, divides the non-orthogonal noise

power by the signal power to calculate the local SIR.

With reference to FIG. 7, there is provided a detailed illustration of the symbol combiner and SIR measurer 532 when the fingers have the structure of FIG. 6. Referring to FIG. 7, an adder (or XOR gate) 711 combines data symbols  
5 output from the respective fingers 521-52M. An adder (or XOR gate) 712 adds the local (i.e., SIRs SIR1-SIRM) output from the respective fingers 521-52M to output a total SIR, which is compared with a threshold to determine a power control command. That is, in the symbol combiner and SIR measurer 532, the adder 712 adds the local SIRs measured by the respective fingers 521-52M to  
10 measure an effective SIR of the overall mobile station receiver. Further, the effective SIR is compared with a threshold. In accordance with the comparison, when the effective SIR is higher than the threshold, a power-down command for the forward link is generated; when the effective SIR is lower than the threshold, a power-up command for the forward link is generated.

15 In an IS-95 forward link, a pilot channel is transmitted via a forward channel to assist in initial acquisition and data demodulation, and a traffic channel sends a power control command via a reverse link at periods of 1.2msec by puncturing-after-insertion.

A mobile station may measure the signal power based on a power control  
20 command transmitted via the forward link. In the above SIR measuring method, it is possible to calculate traffic channel power depending on only energy of the power control command upon detection of a traffic signal.

While FIGs. 6 and 7 illustrate the case where the measured local SIRs of the respective fingers are combined, it is also possible to measure the SIR after

combining signals of the respective fingers at the signal combiner.

### **B. Second Embodiment**

With reference to FIG. 8, there is illustrated in detail a finger for measuring an SIR. In this embodiment, a signal gain input to the symbol  
5 combiner is controlled according to the interference measured by a non-orthogonal noise measurer.

Referring to FIG. 8, a multiplier 811 despreads an input signal by mixing the input signal with a PN sequence. A multiplier 812 multiplies a despread signal outputted from the multiplier 811 by an orthogonal code for the pilot  
10 channel to separate a pilot signal. A channel estimator 813 estimates the strength and phase of a multi-path channel response signal being demodulated by the finger from the output of the multiplier 811. A complex conjugator 815 complex conjugates an output of the channel estimator 813. A multiplier 823 multiplies an output of a demultiplier 821 by an output of the complex conjugator 815 and  
15 provides its output to the symbol combiner and SIR measurer 532.

A multiplier 817 multiplies the despread signal output from the multiplier 811 by an orthogonal code assigned to the traffic channel to separate a traffic channel signal. An accumulator 819 accumulates the traffic channel signal output from the multiplier 817 in the symbol unit to output an indented data component,  
20 which is provided to the demultiplier 821.

Also, the despread signal output from the multiplier 811 is applied to a non-orthogonal noise measurer 630, which measures the non-orthogonal noise power in the above described manner and provides the measured non-orthogonal noise power to the demultiplier 821. Here, the non-orthogonal noise measurer

630 may have the structure of FIG. 3 or 4.

The demultiplier 821 divides the traffic signal power output from the accumulator 819 by the non-orthogonal noise power output from the non-orthogonal noise power measurer 630, to generate a local SIR signal of the  
5 corresponding finger. The output of the demultiplier 821 is provided to the multiplier 823.

With reference to FIG. 9, there is illustrated a symbol combiner and SIR measurer 532 according to the second embodiment, which processes the outputs of the fingers having the structure of FIG. 8. Referring to FIG. 9, an adder (or  
10 XOR gate) 912 adds data values outputted from the fingers 521-52M, and a power detector 914 detects output power of the adder 912 and outputs the detected output power as an SIR value, which is compared with a threshold to generate a power control command for the forward link.

When measuring the SIR as illustrated in FIG. 9, a mobile station can  
15 measure the signal power based on the power control command transmitted via the forward link. In the above SIR measuring method, it is possible to calculate the traffic channel power depending on only the power control command upon detection of a traffic signal.

In summary, the non-orthogonal noise components detected by the non-  
20 orthogonal noise measurer can be used as an SIR to be measured in a reception device. Further, for forward link power control, the SIR measured in the reception device is compared with a threshold to determine whether to increase or decrease the forward link power. The SIRs measured at the respective fingers can be used in controlling gains of the fingers.

Although the present invention has been described with reference to the cases where the novel non-orthogonal noise measurer is applied to an IS-95 sync channel, it is equally applicable to a low rate traffic channel or a pilot channel repeating the same symbols, which have the similar characteristic to that of the  
5 IS-95 sync channel. In addition, the novel non-orthogonal noise measurer can also be applied to a 3<sup>rd</sup> generation CDMA communication system.

As described above, the novel CDMA communication system measures non-orthogonal noise power using a forward channel having no specific information (i.e., no voice or data) or a low rate channel. This provides an  
10 effective non-orthogonal noise measuring method for a 3<sup>rd</sup> generation CDMA communication system. An advantage of the present invention is that it can be applied to the IS-95 communication system without a modification in channel structure. In addition, the novel non-orthogonal noise measuring method can measure an accurate non-orthogonal noise component using all the orthogonal  
15 codes. So, it is possible to increase the performance of a reception device by increasing the accuracy of an SIR.

While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without  
20 departing from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A non-orthogonal noise detecting device for a code division multiple access (CDMA) communication system, comprising:
  - a despreader for despreading multiple channel signals including a specific  
5 channel with an orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate despread repeated symbols;
  - a difference signal generator for receiving the despread second symbols, and generating a difference signal between a presently received second symbol  
10 and a previously received second symbol; and
  - a noise detector for converting the difference signal to an energy value to generate a non-orthogonal noise signal.
2. The non-orthogonal noise detecting device as claimed in claim 1, wherein the despreader comprises:
  - 15 an orthogonal demodulator for despreading the received channel signal with an orthogonal code assigned to a channel for transmitting the first symbol; and
  - an accumulator for accumulating the symbols orthogonally modulated for the first symbol duration in a unit of the second symbol.
- 20 3. The non-orthogonal noise detecting device as claimed in claim 2, wherein the difference signal generator comprises:
  - a delay for delaying the second symbols output from the despreader; and
  - a subtracter for subtracting the second symbols output from the despreader from the delayed second symbols to generate the non-orthogonal



noise component.

4. The non-orthogonal noise detecting device as claimed in claim 3, wherein the noise detector comprises:

a squarer for converting an output of the difference signal generator to an  
5 energy component; and

a filter for filtering an output of the squarer in a noise band to generate the non-orthogonal noise signal.

5. The non-orthogonal noise detecting device as claimed in claim 1, further comprising a down-sampler connected to the noise detector, for down-  
10 sampling the non-orthogonal noise signal so as not to select an output generated at a boundary duration of the first symbol as a non-orthogonal noise.

6. The non-orthogonal noise detecting device as claimed in claim 5, wherein the first symbol is a sync channel symbol and the second symbol is a traffic channel symbol.

15 7. A non-orthogonal noise detecting device for a CDMA communication system, comprising:

a despreader for despreading a received signal with an orthogonal code for a sync channel;

an accumulator for accumulating the despread sync channel signal in a  
20 unit of traffic channel symbol duration;

a difference signal generator for delaying an output of the accumulator in a unit of traffic channel symbol duration and calculating a difference between the delayed traffic-duration symbol signal and the despread traffic-duration symbol signal;

a non-orthogonal noise detector for converting the difference signal to an energy component to generate a non-orthogonal noise component; and

a down-sampler for receiving the non-orthogonal noise signals and down-sampling the received non-orthogonal signals so as not to select an output

5 generated at a boundary of the sync channel symbol as a non-orthogonal noise.  
non

8. A non-orthogonal noise detecting device for a CDMA communication system, comprising:

a desreader for desreading multiple channel signals including a specific  
10 channel with an orthogonal code assigned to the specific channel repeating the same data, to generate despread repeated symbols;

a difference signal generator for receiving the despread repeated symbols, and detecting a difference between a presently received symbol and a previously received symbol; and

15 a noise detector for converting the difference signal to an energy component to generate a non-orthogonal noise signal.

9. The non-orthogonal noise detecting device as claimed in claim 8, further comprising a down-sampler connected to the noise detector, for down-sampling the non-orthogonal noise signals.

20 10. The non-orthogonal noise detecting device as claimed in claim 9, wherein the channel repeating the same data is a pilot channel.

11. A non-orthogonal noise detecting method for a CDMA communication system, comprising the steps of:

desreading multiple channel signals including a specific channel with an

orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate despread repeated symbols;

receiving the despread second symbols, and generating a difference signal  
5 between a presently received second symbol and a previously received second symbol; and

converting the difference signal to an energy value to generate a non-orthogonal noise signal.

12. The non-orthogonal noise detecting method as claimed in claim 11,  
10 wherein the despread step comprises the steps of:

despreading the received channel signal with an orthogonal code assigned to a channel for transmitting the first symbol; and

accumulating the symbols orthogonally modulated for the first symbol duration in a unit of the second symbol.

13. The non-orthogonal noise detecting method as claimed in claim 12,  
15 wherein the difference signal generating step comprises the steps of:

delaying the second symbols; and

subtracting the second symbols from the delayed second symbols to generate the non-orthogonal noise component.

14. The non-orthogonal noise detecting device as claimed in claim 11,  
20 further comprising the step of down-sampling the non-orthogonal noise signal so as not to select an output generated at a boundary duration of the first symbol as a non-orthogonal noise.

15. The non-orthogonal noise detecting device as claimed in claim 11,

wherein the first symbol is a sync channel symbol and the second symbol is a traffic channel symbol.

16. A non-orthogonal noise detecting method for a CDMA communication system, comprising the steps of:

5       despreading multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating the same data, to generate despread repeated symbols;

          receiving the despread repeated symbols, and detecting a difference between a presently received symbol and a previously received symbol; and

10       converting the difference signal to an energy component to generate a non-orthogonal noise signal.

17. The non-orthogonal noise detecting method as claimed in claim 16, further comprising the step of down-sampling the non-orthogonal noise signals.

18. A non-orthogonal noise detecting device for a CDMA  
15 communication system, comprising:

          a channel coder for coding a specific traffic channel signal being transmitted at a lower rate as compared with other channel signals;

          a pattern inserter for inserting a specific pattern in an output of the channel coder;

20       a base station device including a spreader for spreading an output of the pattern inserter with an orthogonal code for a corresponding channel;

          a desreader for despreading multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate  
25 despread repeated symbols;

a pattern remover for removing the specific pattern from the despread signal;

a difference signal generator for receiving the pattern-removed second symbols, and generating a difference signal between a presently received second  
5 symbol and a previously received second symbol; and

a noise detector for converting the difference signal to an energy value to generate a non-orthogonal noise signal.

19. The non-orthogonal noise detecting device as claimed in claim 18, further comprising a down-sampler for down-sampling the non-orthogonal noise  
10 signal so as not to select an output generated at a boundary duration of the first symbol as a non-orthogonal noise.

20. The non-orthogonal noise detecting device as claimed in claim 19, wherein the first symbol is a sync channel symbol and the second symbol is a traffic channel symbol.

15 21. A non-orthogonal noise detecting device for a CDMA communication system, comprising:

a despreader for despreding multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating k  
same second symbols at a given first symbol duration, to generate despread  
20 repeated symbols;

a non-orthogonal nose operator for delaying the despread second symbols by k-1, applying a predetermined gain control value to the present symbol and the (k-1) delayed second symbols, and operating the gain-controlled second symbols to generate a non-orthogonal noise component;

25 a noise detector for converting the difference signal to an energy value to

generate a non-orthogonal noise signal.

22. The non-orthogonal noise detecting device as claimed in claim 21, wherein the despreader comprises:

an orthogonal demodulator for despreading the received channel signal  
5 with an orthogonal code assigned to a channel for transmitting the first symbol;  
and

an accumulator for accumulating the symbols orthogonally modulated for the first symbol duration in a unit of the second symbol.

23. The non-orthogonal noise detecting device as claimed in claim 22,  
10 wherein the non-orthogonal noise operator comprises:

(K-1) delays connected in cascade, for delaying the second symbols output from the despreader;

gain controllers for multiplying the received second symbol and the (k-1) delayed second symbols by predetermined corresponding gain control values,  
15 wherein the sum of the gain control values become zero; and

an adder for adding outputs of the gain controllers to generate the non-orthogonal noise component.

24. The non-orthogonal noise detecting device as claimed in claim 21 or 23, further comprising a down-sampler connected to the noise detector, for  
20 down-sampling the non-orthogonal noise signal so as not to select an output generated at a boundary duration of the first symbol as a non-orthogonal noise.

25. The non-orthogonal noise detecting device as claimed in claim 24, wherein the first symbol is a sync channel symbol and the second symbol is a traffic channel symbol.

26. A non-orthogonal noise detecting method for a CDMA communication system, comprising:

despreading multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating  $k$  same second

5 symbols at a given first symbol duration, to generate despread repeated symbols;

delaying the despread second symbols by  $k-1$ , applying a predetermined gain control value to the present symbol and the  $(k-1)$  delayed second symbols, and operating the gain-controlled second symbols to generate a non-orthogonal noise component;

10 converting the difference signal to an energy value to generate a non-orthogonal noise signal.

1/10

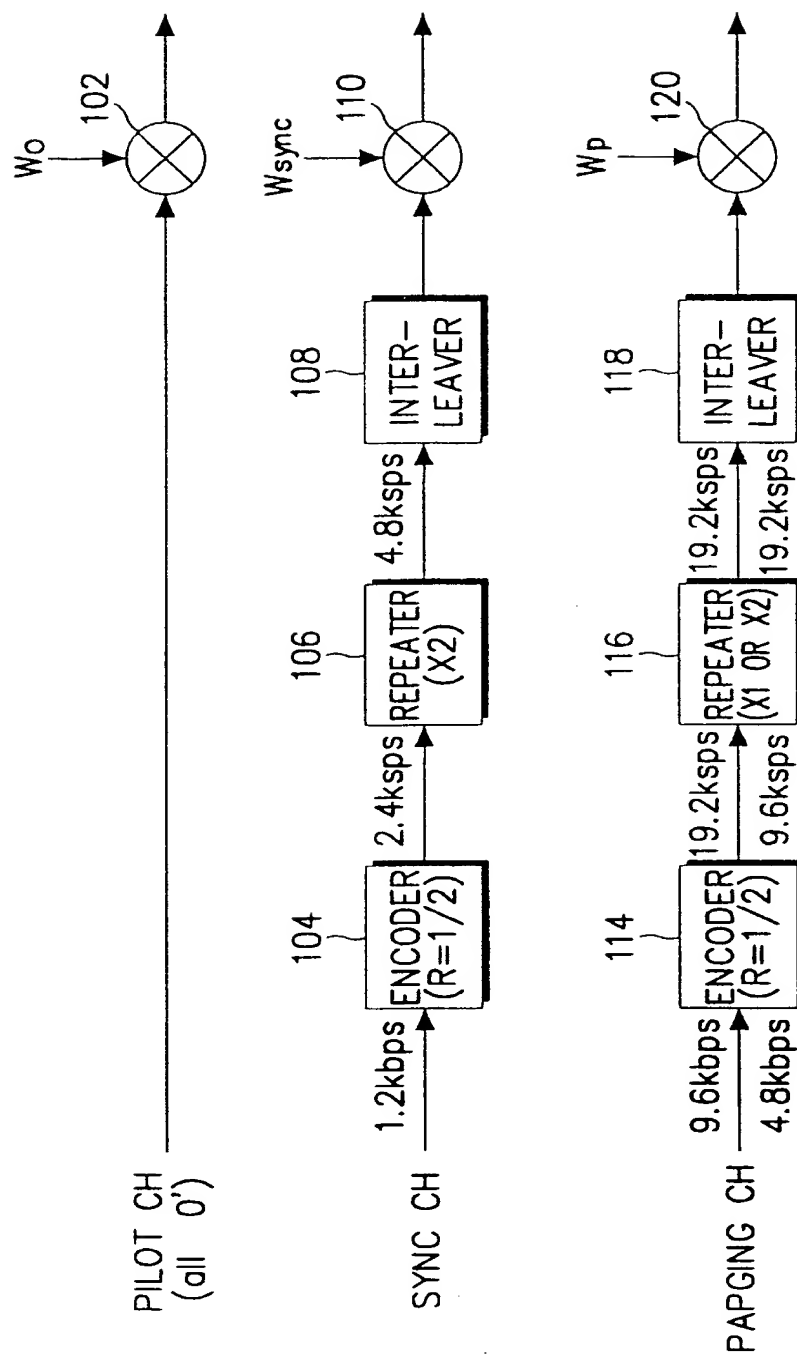


FIG. 1



2/10

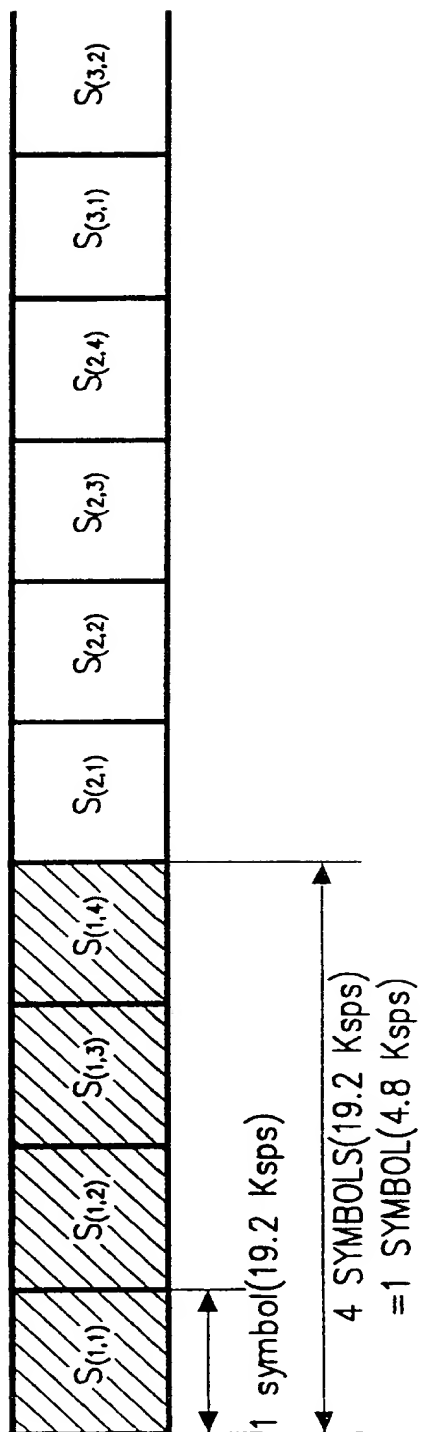


FIG. 2

3/10

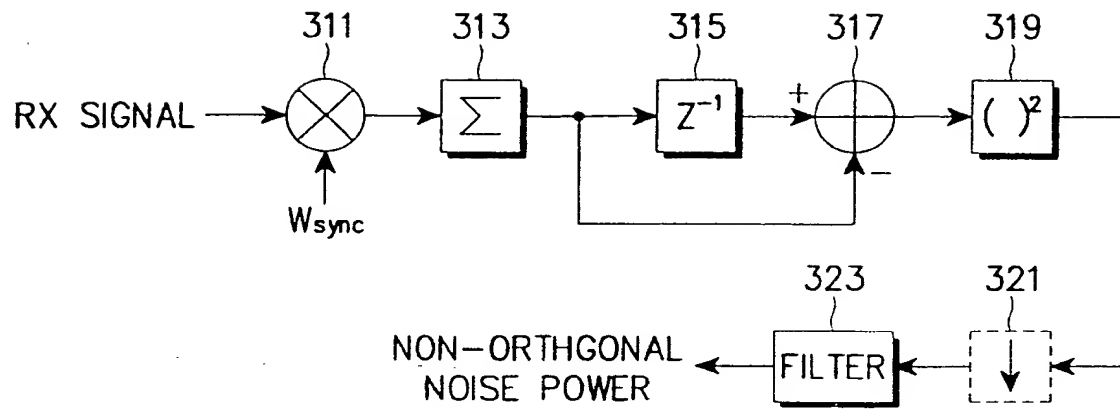


FIG. 3

4/10

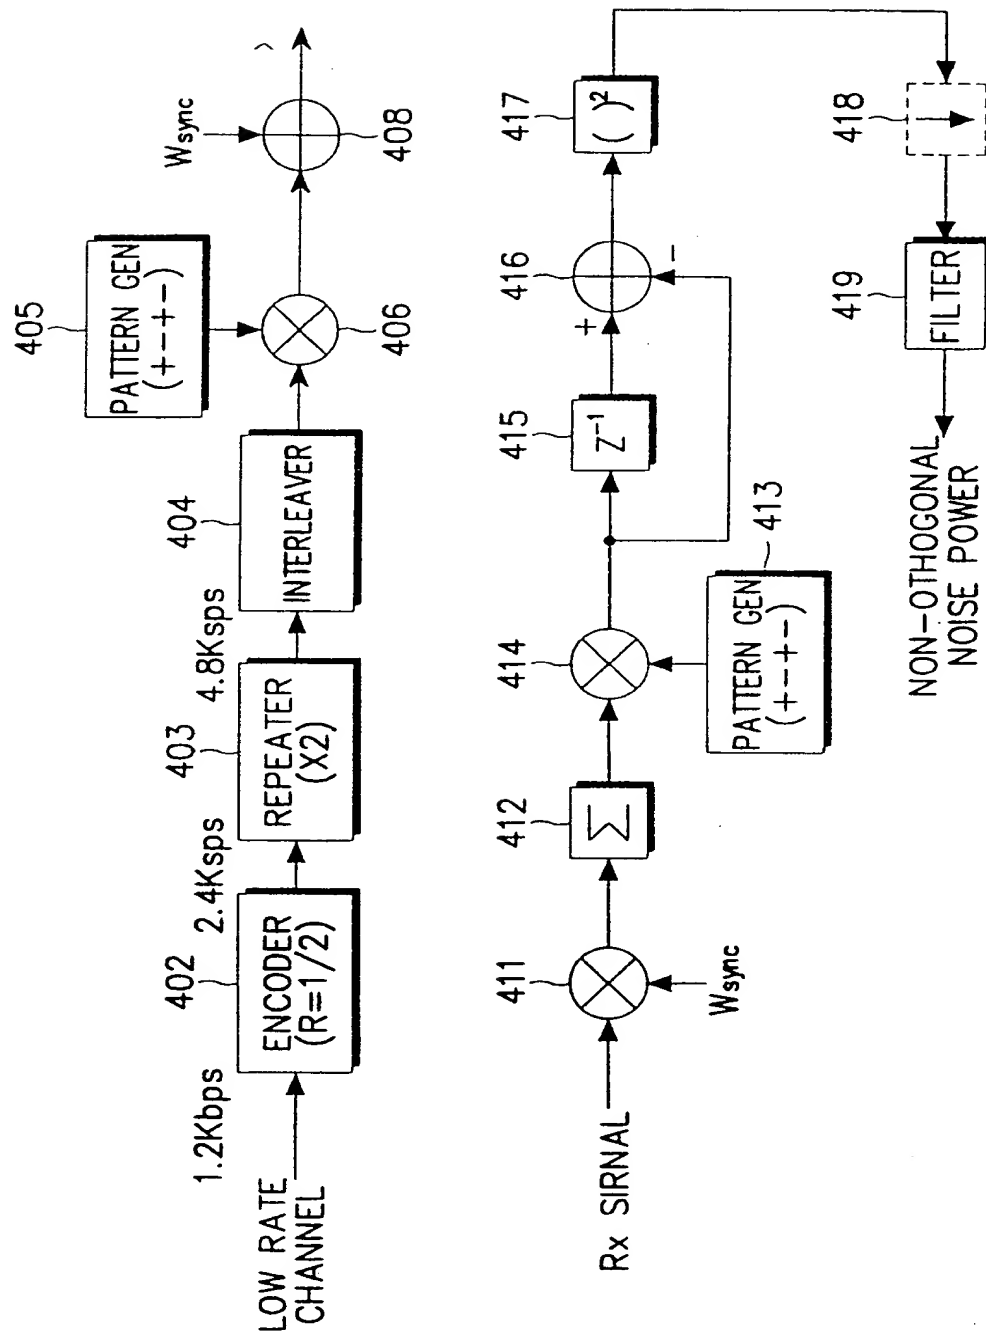


FIG. 4

5/10

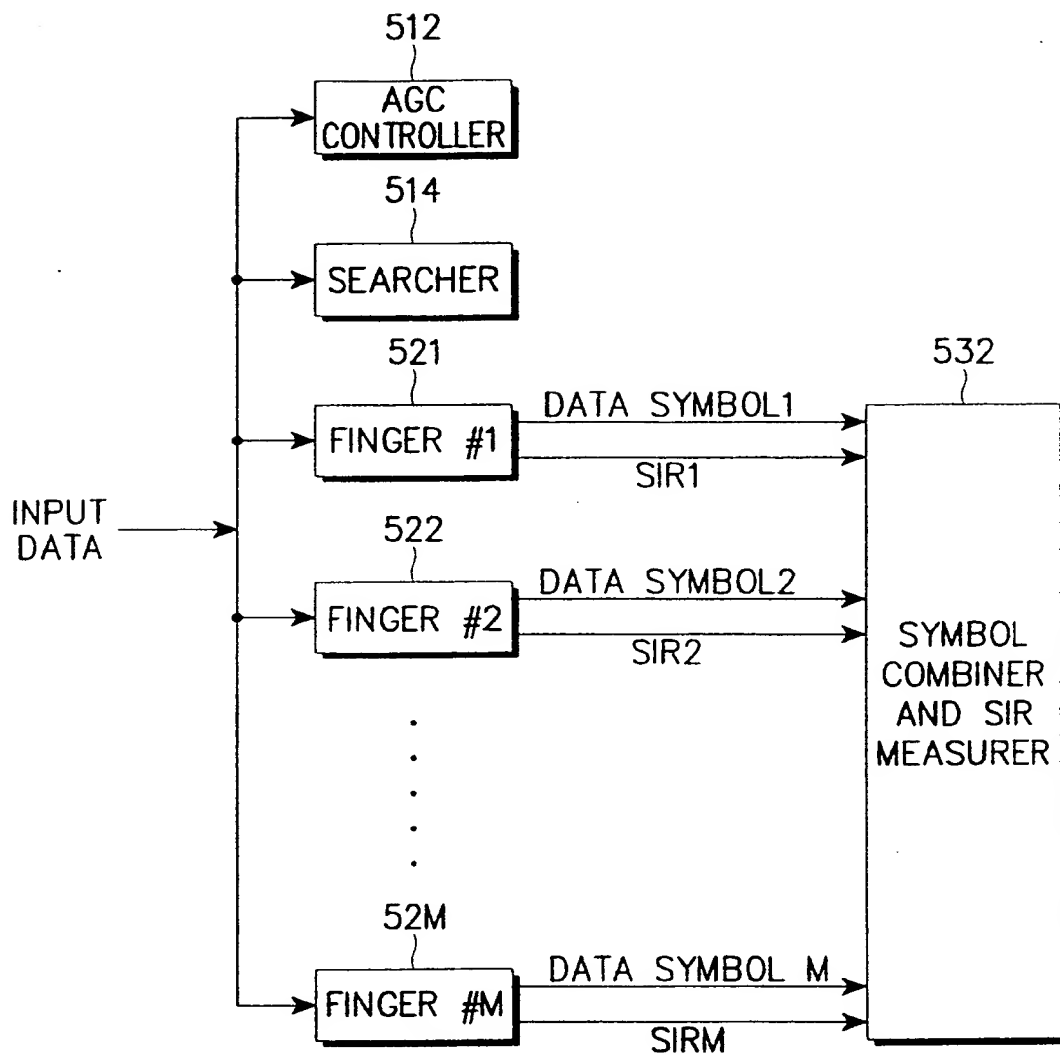


FIG. 5

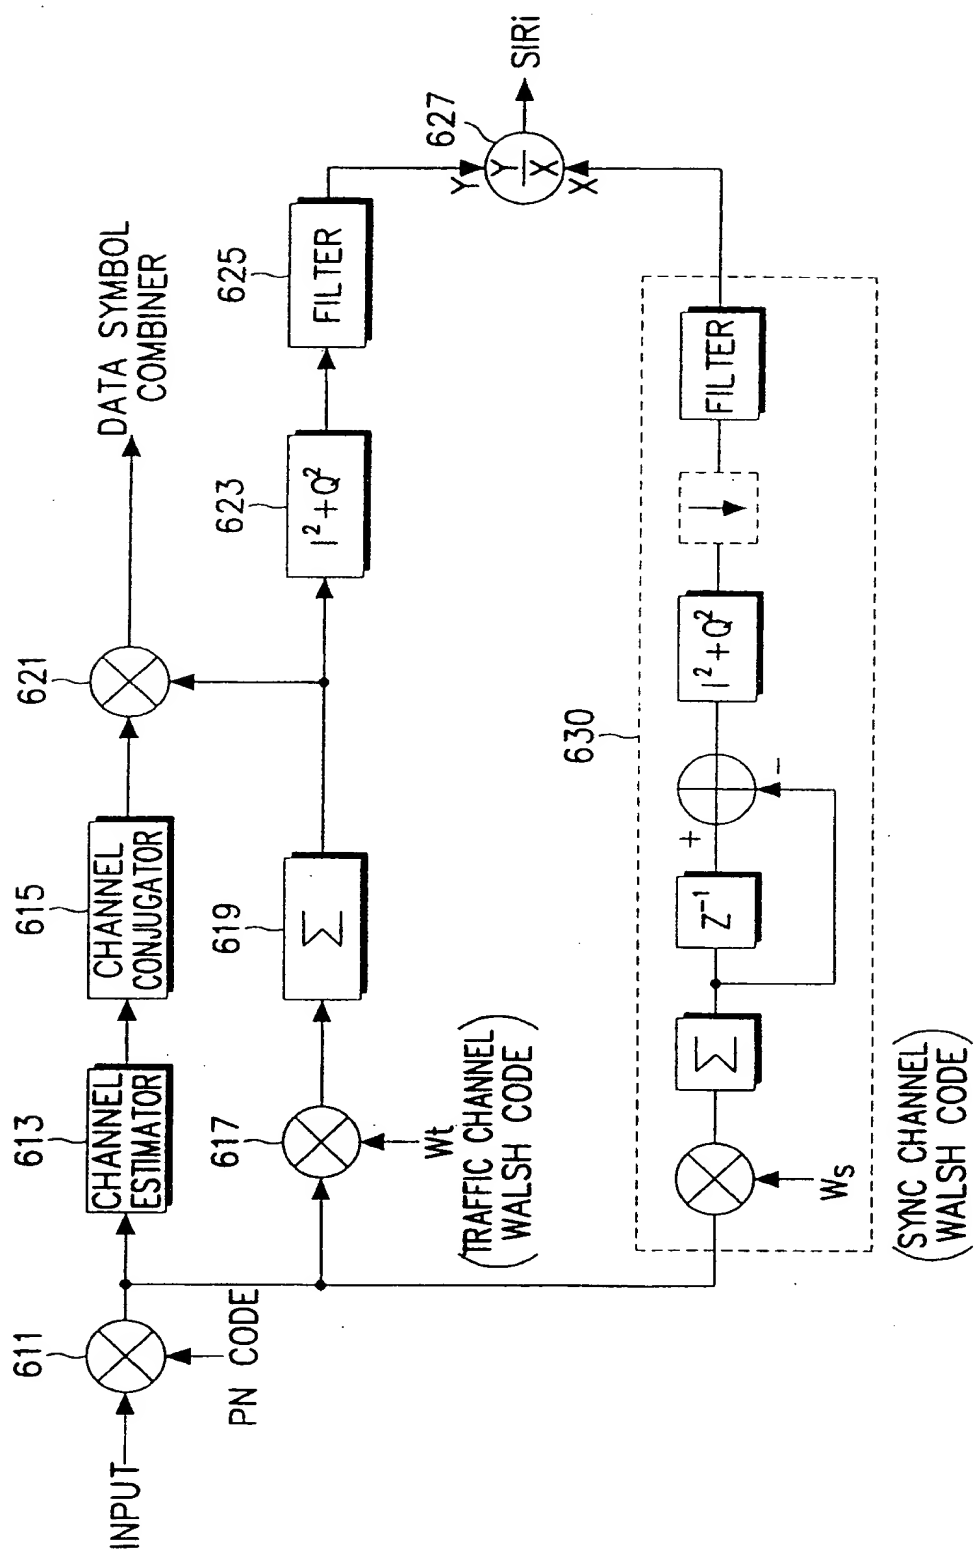


FIG. 6

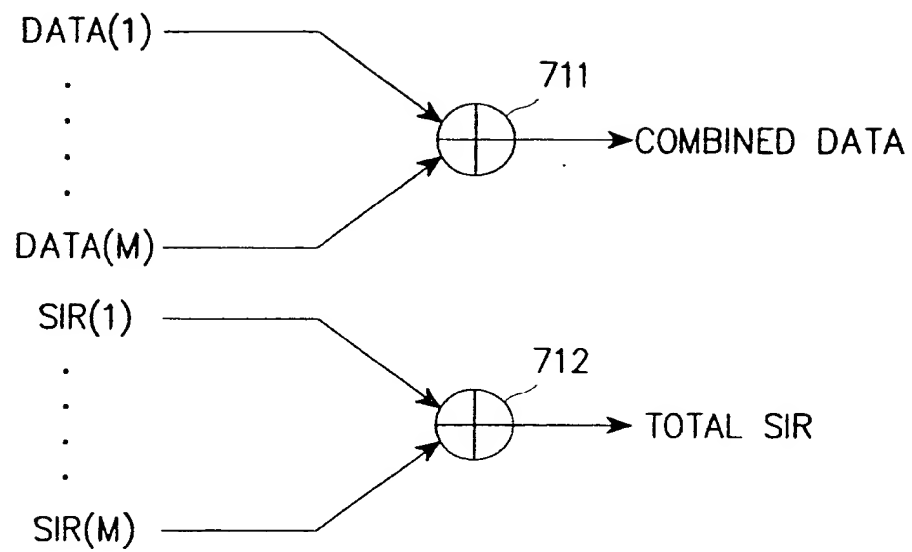


FIG. 7

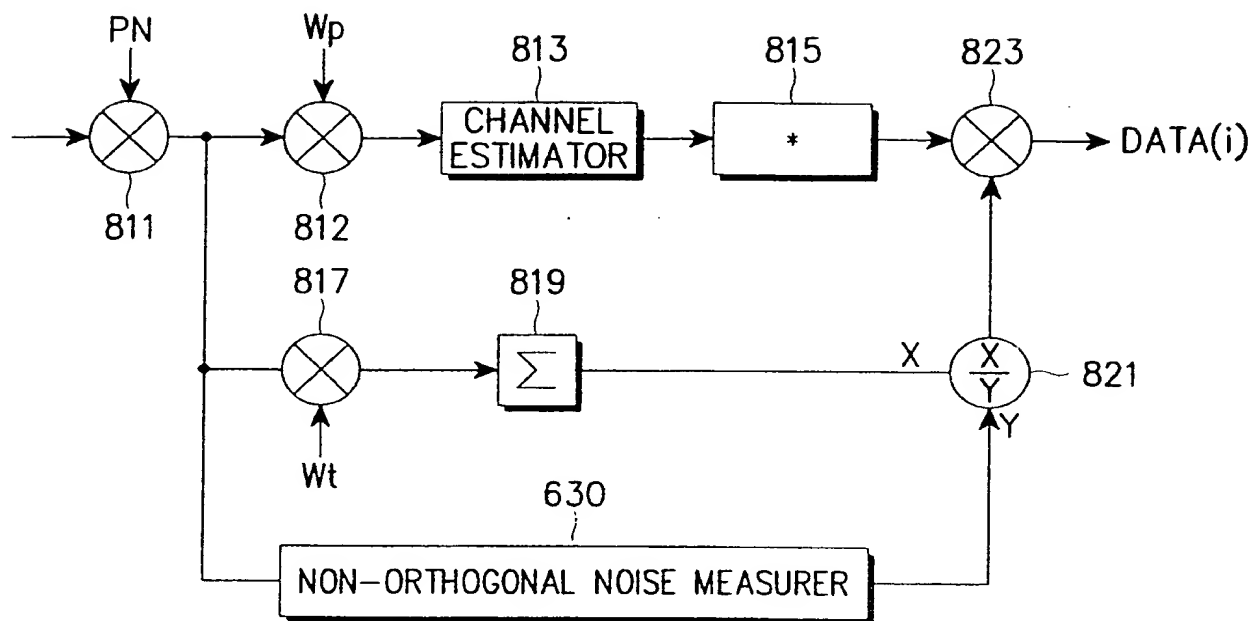


FIG. 8

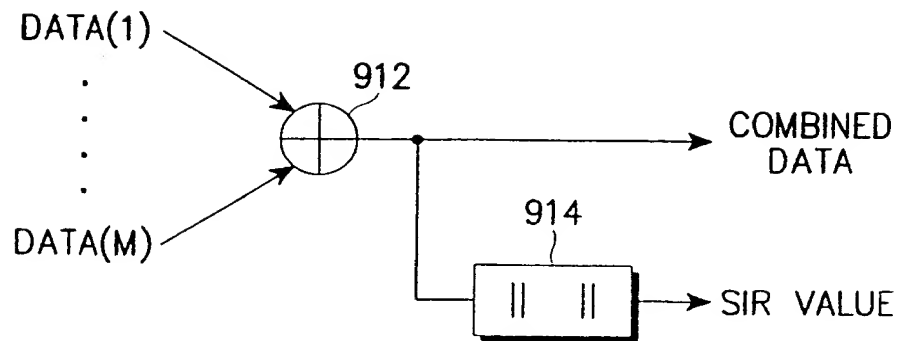


FIG. 9



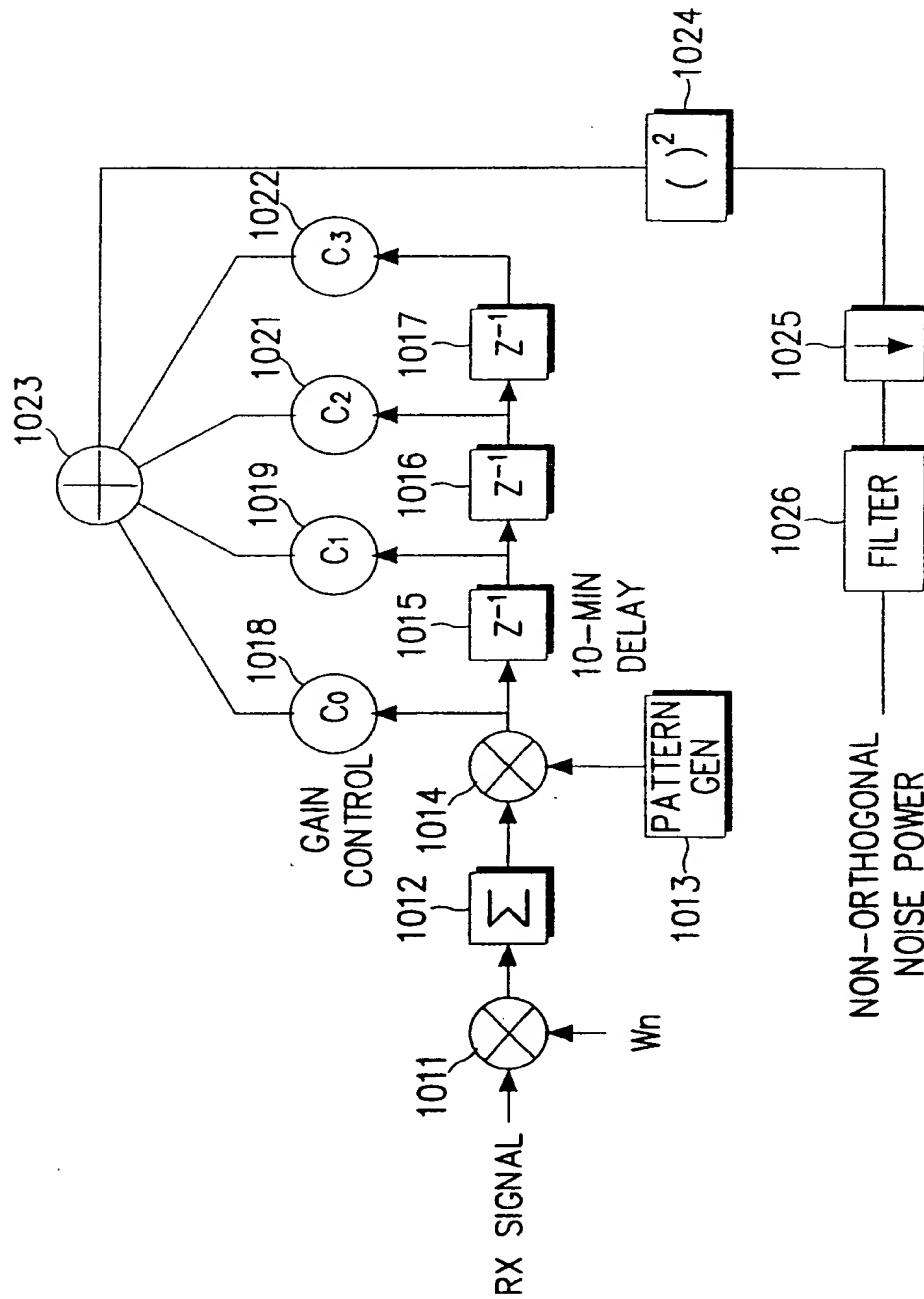


FIG. 10






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 7 :</b> <b>H04J 13/02</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 99/66643</b> <b>(43) International Publication Date:</b> 23 December 1999 (23.12.99)
<b>(21) International Application Number:</b> PCT/KR99/00293 <b>(22) International Filing Date:</b> 14 June 1999 (14.06.99)  <b>(30) Priority Data:</b> 1998/22215      13 June 1998 (13.06.98)      KR  <b>(71) Applicant:</b> SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR).  <b>(72) Inventors:</b> MOON, Hi, Chan; 391, Pungnap-dong, Songpa-gu, Seoul 138-040 (KR). KIM, Jong, Han; Byeoksan Apt., #202-1103, Jukjeon-ri, Suji-up, Yongin-shi, Kyonggi-do 449-840 (KR).  <b>(74) Agent:</b> LEE, Keon, Joo; Mihwa Building, 110-2, Myon- gryun-dong 4-Ga, Chongro-gu, Seoul 110-524 (KR).		<b>(81) Designated States:</b> AU, BR, CA, CN, ID, IL, JP, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>  <b>(88) Date of publication of the international search report:</b> 6 April 2000 (06.04.00)

**(54) Title:** DEVICE AND METHOD FOR MEASURING NON-ORTHOGONAL NOISE POWER FOR CDMA COMMUNICATION SYSTEM

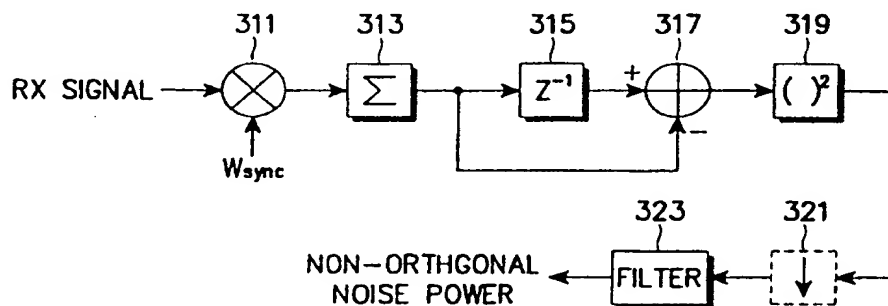**(57) Abstract**

A non-orthogonal noise detecting device for a CDMA communication system. In the device, a despreader (311) despreads multiple channel signals including a specific channel with an orthogonal code assigned to the specific channel repeating at least two same second symbols at a given first symbol duration, to generate despread repeated symbols. A difference signal generator (315, 317) receives the despread second symbols, and generates a difference signal between a presently received second symbol and a previously received second symbol. A noise detector (319) converts the difference signal to an energy value to generate a nonorthogonal noise signal.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago -
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00293

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: H04J 13/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: H04B; H04J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, PAJ, IEEE Trans. on Comm., IEEE Comm. Letters

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 297 161 A (LING) 22 March 1994 (22.03.94) figs. 1, 2; abstract; col. 1, line 15 – col. 5, line 8	1-26
A	US 5 448 600 A (LUCAS) 5 September 1995 (05.09.95) figs. 3, 4; col. 3, line 47 – col. 7, line 18; claim 1	1-26
A	US 5 559 790 A (YANO ET AL.) 24 September 1996 (24.09.96) figs.; col. 1, line 17 – col. 11, line 36; claims	1-26
A	US 5 754 533 A (BENDER ET AL.) 19 May 1998 (19.05.98) fig. 1; abstract; col 4, line 17 – col. 8, line 48; claims -----	1-26

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&amp;“ document member of the same patent family

Date of the actual completion of the international search

30 December 1999 (30.12.99)

Date of mailing of the international search report

01 February 2000 (01.02.00)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/200

Authorized officer

Mesa-Pascasio

Telephone No. 1/53424/327

Form PCT/ISA/210 (second sheet) (July 1998)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00293

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	A	5297161	22-03-1994	BR A 9306623	08-12-1998
				CA C 2137460	18-08-1998
				DE T 4392993	01-06-1995
				DE C2 4392993	26-09-1996
				FI A 946045	22-12-1994
				FI A0 946045	22-12-1994
				JP T2 7508383	14-09-1995
				KR B1 9708172	21-05-1997
				MX A1 9303881	31-01-1994
				SE A0 9404427	21-12-1994
				SE A 9404427	28-02-1995
				WO A1 9400926	06-01-1994
				WO A1 9400043	06-01-1994
				AU A1 45540/93	24-01-1994
				SK A3 1616/94	07-06-1995
				AU B2 665664	11-01-1996
				DE C0 69313637	09-10-1997
				DE T2 69313637	09-04-1998
				EP A1 647111	12-04-1995
				EP B1 647111	03-09-1997
				GR T3 3025562	31-03-1998
				HK A1 1002820	18-09-1998
				JP T2 7508436	21-09-1995
				PL B1 170948	28-02-1997
				AT E 157521	15-09-1997
				BR A 9306624	08-12-1998
				CZ A3 9403328	17-05-1995
				CZ B6 284062	12-08-1998
				DK T3 647111	13-10-1997
				ES T3 2108288	16-12-1997
				HU A0 9403834	28-02-1995
				HU A2 69534	28-09-1995
				NZ A 254033	21-12-1995
US	A	5448600	05-09-1995	DE C0 69415611	11-02-1999
				DE T2 69415611	09-09-1999
				EP A1 639010	15-02-1995
				EP B1 639010	30-12-1998
				ES T3 2128523	16-05-1999
				FI A0 943605	03-08-1994
				FI A 943605	14-02-1995
				FR A1 2709028	17-02-1995
US	A	5559790	24-09-1996	FR B1 2709028	20-10-1995
				JP A2 7038496	07-02-1995
US	A	5754533	19-05-1998	US A 5870393	09-02-1999
				AU A1 70096/96	19-03-1997
				CN A 1197559	28-10-1998
				EP A1 846377	10-06-1998
				IL A0 123407	24-09-1998
				JP T2 11501483	02-02-1999
				WO A1 9708848	06-03-1997